
0047-TA-Q

The wall mounted sink fitting is designed with a solid cast brass body with replaceable seats. The flanges are all brass and have 1/2-inch male pipe connections. The inlet supply location is adjustable by rotating the flange to obtain a 1/4-inch center variation. The 6-inch spout has a water saving aerator that limits the flow. The stems are all brass, with a double O-Ring seal and rubber seat washer (for compression stems) or ceramic sealing discs (for ceramic units). The canopy handles are zinc die cast with a chrome plated finish. The faucet and flanges are polished and copper, nickel, and chrome plated.

Flow Rate: 2.0 GPM @ 60 psi ADA Compliant and Meets ASME A112.18.1M Certified by IAPMO R&T to NSF/ANSI 61

Installation Drawing



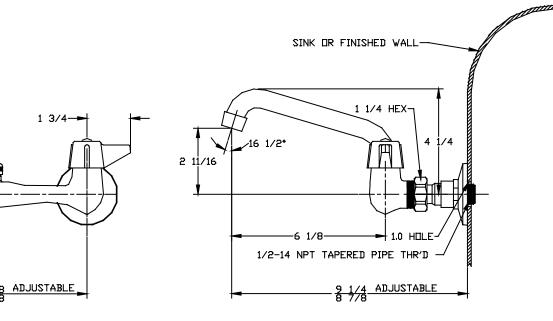



O-Ring Compression 1/4-Turn Compression

0047-TA

Ceramic Units 80047-TA

Central Brass

COMPANY Brecksville, Ohio 44141 Phone: (216) 883-0220 Fax: (440) 526-5745 www.CentralBrass.com



2 1/2-

2

Dia



COMPANY Brecksville, Ohio 44141 Phone: (216) 883-0220 Fax: (440) 526-5745 www.CentralBrass.com

Handle variations available

ELS - Suffix Wrist 4-inch EL - Suffix Elbow 6-inch

G-4147 (4-inch) G-4149 (6-inch)

MODEL NOS. <u>0047-TA</u> <u>80047-TA</u> SINK FIXTURE


Suffix Options & Accessories



Faucets with lever, wrist or elbow handles with compression or ceramic stem cartridges are ADA compliant.


Spout variations available

- A1 Suffix
- 8-inch Brass Tube Spout A2 - Suffix
- 10-inch Brass Tube Spout A3 - Suffix
- 12-inch Brass Tube Spout A4 - Suffix 14-inch Brass Tube Spout
- H Suffix replaces A for hose end




A9 - Suffix 5-inch Cast Brass Spout

H - Suffix replaces A for hose end

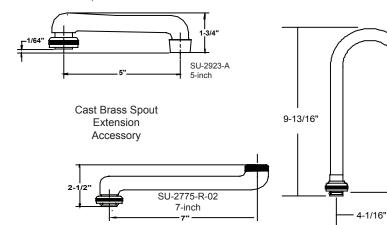

- A6 Suffix 8-inch Brass D-Spout
- H Suffix replaces A for hose end



- GSA Suffix 4 3/32 Swivel Gooseneck Spout GRA - Suffix
- 4 3/32 Rigid Gooseneck Spout


9°

5-5/8'

SU-157-GSA

4 3/32 -inch Swivel Availavle in Rigid

- H Suffix replaces A for hose end
- KSA Suffix 5 1/2 Swivel Gooseneck Spout KRA - Suffix
 - 5 1/2 Rigid Gooseneck Spout
- H Suffix replaces A for hose end



Central Brass

Brecksville, Ohio 44141 Phone: (216) 883-0220 Fax: (440) 526-5745 www.CentralBrass.com


#	Part #	Description
1	2831-CP	Brass Faucet Body
2	263-BC	Bronze Seat
3	1038-Y	Nylon Gasket
4	104	Brass Seat Washer Screw
5	901-WNN	Seat Washer
6	453-FL	Brass Left Threat O-Ring Stem
6	453-FR	Brass Right Thread O-Ring Stem
7	1038-453	O-Ring
8	453-EWC	Brass Left Thread O-Ring Bonnet
8	453-EWH	Brass Right Thread O-Ring Bonnet

(9



Parts Breakdown

#	Part #	Description
9	523-C	Handle Indexed "C"
9	523-H	Handle Indexed "H"
10	107-F	Brass Phillips Head Screw
11	1038-KN	O-Ring
12	166-FN	Stainless Steel Snap Ring
13	PF-782-D	Brass Spout Nut
14	PF-2924	Brass Swivel Spout
15	30-M	Female Aerator
16	1146	Flange
17	PF-2843-49	Brass Hex Spout Nut
18	2846	Brass Flange
19	940-TRN	Washer
20	SU-453-EL	Left Thread O-Ring Stem Assembly
20	SU-453-ER	Right Thread O-Ring Stem Assembly
21	SU-2846	Brass Flange Assembly

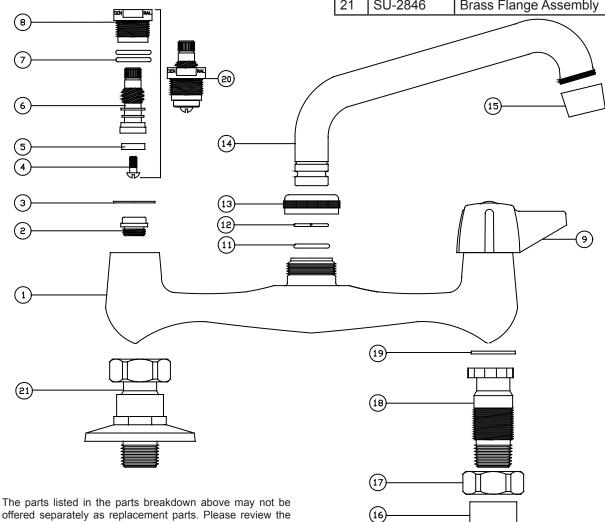

The parts listed in the parts breakdown above may not be offered separately as replacement parts. Please review the Replacement Parts page for the authorized replacement parts that are available for this item.