
American Standard

Style That Works Better

# BERWICK<sup>™</sup> SINGLE CONTROL VESSEL FAUCET

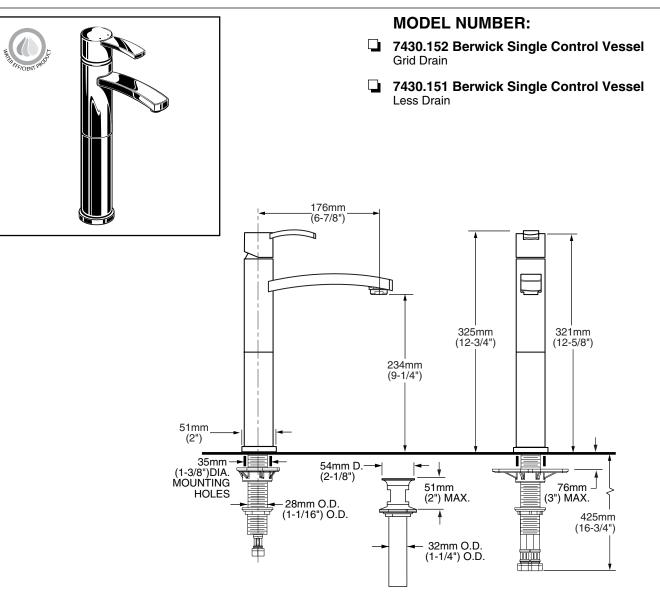

## **GENERAL DESCRIPTION:**

Brass body. Metal lever handle. Washerless 35mm ceramic disc valve cartridge with integral hot limit safety stop. Braided flexible supply hoses with 3/8" compression connectors. 1.5 gpm/5.7L/min. maximum flow rate.

## **PRODUCT FEATURES:**

Brass Construction: Durable. Easy to clean. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridge:** Assures a lifetime of smooth handle operation and drip-free performance.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

**Lead Free:** Faucet contains  $\leq 0.25\%$  total lead content by weighted average.

**Choice of Finishes:** Available in Polished Chrome or Satin Nickel (PVD).

#### SUGGESTED SPECIFICATION:

Single control lavatory faucet shall feature a brass body and metal lever handle. Fitting shall be equipped with flexible supplies with 3/8" compression connectors. Shall also feature washerless ceramic disc valve cartridge with an integral hot limit safety stop. Fitting shall be American Standard Model # 7430.\_\_\_\_.




Style That Works Better

# BERWICK<sup>™</sup> SINGLE CONTROL VESSEL FAUCET

## **CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 NSF 61/Section 9 and Annex G CSA B125.1



			Finish Options	
Product		Polished Chrome	PVD Satin Nickel	
Number	Description	002	295	
7430.152	Berwick Single Control Monoblock faucet with grid drain.			
7430.151	Berwick Single Control Monoblock faucet less drain.			

And ANSI A117.1 Requirements for the physically challenged.