

### CADET™ 5' X 36" WHIRLPOOL AND BATHING POOL

- 2771.018W Whirlpool featuring System I**
  - Acrylic with fiberglass reinforcement
  - Pre-leveled tub bottom
  - Form-fitted backrest position
  - Dual, molded in arm rests
  - 1.6 HP single speed, self-draining pump/motor
  - Factory installed power cord with plug
  - Eight multi-directional and flow-adjustable jets including:
    - Two Ideal-flow jets
    - Four body massage jets
    - Two recessed back-rest jets
  - Deck-mounted air switch On/Off
  - Two silent air volume controls
  - Quick Connect Safe-T-Heater connection system
  - Factory installed and tested whirlpool system

- 2771.018WC EverClean® Whirlpool Featuring System I:**
  - Same as 2771.018W except with the EverClean System

- 2771.002 Bathing Pool only**

#### Nominal Dimensions:

1524 x 914 x 502mm  
(60" x 36" x 19-3/4")

#### Compliance Certifications -

#### Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

American Standard whirlpools and air baths with EverClean® incorporate a patented silver-ion additive right into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.

SEE REVERSE FOR PRODUCT DIMENSIONS AND SPECIFICATIONS



#### To Be Specified - Required:

- Color:
- Bath Filler: (specify finish)
- Bath Drain: 1583.470 (specify finish)



#### To Be Specified - Optional:

- Safe-T-Heater\*: 9075.120
- 5 Foot Acrylic Apron: 9360.018 (specify color)
- 5 Foot Apron: 9260.018 (specify color)
- Jet Trim Ring Kit: 9860.200-two per kit (specify finish)
- Universal Tile Bead Kit: 751755-100
- Grab Bar Kit: 9822.200-two per kit (specify finish)

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

\* **NOTE:** the Safe-T-Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

## CADET™ 5' x 36" WHIRLPOOL AND BATHING POOL HIGH GLOSS

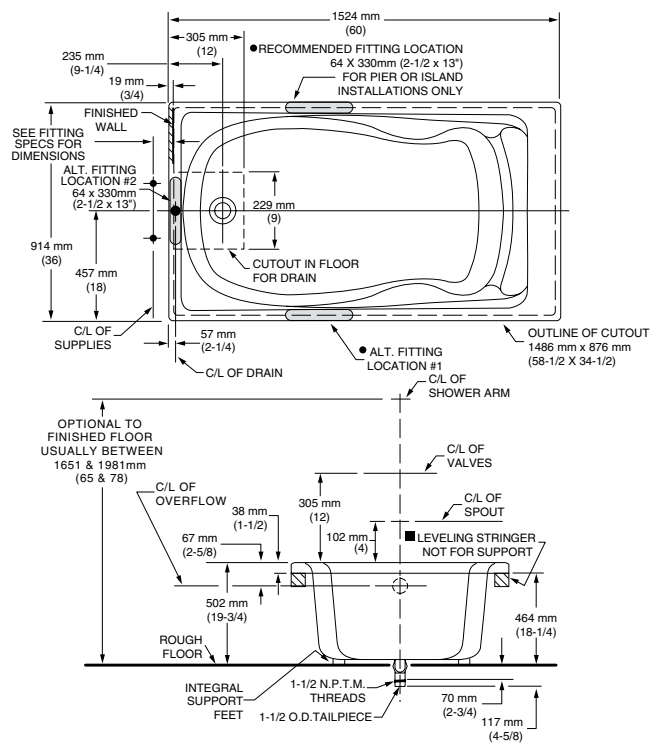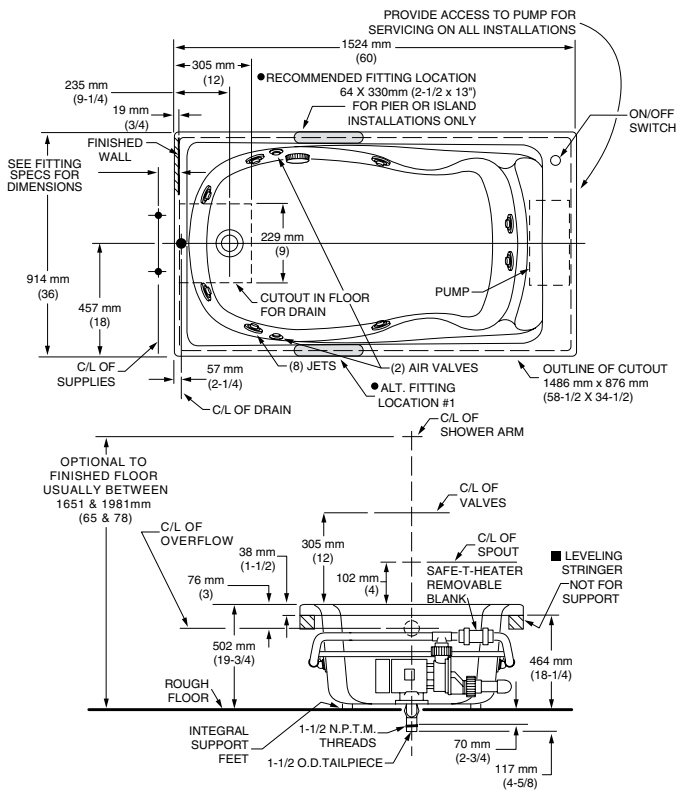

### GENERAL SPECIFICATIONS FOR 2771 WHIRLPOOL

INSTALLED SIZE	60 x 36 x 19-3/4 In. (1524 x 914 x 502mm)
WEIGHT	95 Lbs. (43 Kg.)
WEIGHT w/WATER	587 Lbs. (267 Kg.)
GAL. TO OVERFLOW	59 Gal. (224 L.)
MIN. OPERATING GAL.	48 Gal. (182 L.)
BATHING WELL AT SUMP	40 x 22 In. (1016 x 559mm)
BATHING WELL AT RIM	52 x 29 In. (1321 x 737mm)
WATER DEPTH TO OVERFLOW	13-1/4 In. (337mm)
FLOOR LOADING (PROJECTED AREA)	39 Lbs./Sq. Ft. (188 Kgs/Sq. m.)
PTS.	23.8
CUBE (FT <sup>3</sup> )	44.5

### WHIRLPOOL ELECTRICAL SPECIFICATIONS

SYSTEM I PUMP	1.6 HP, 9.7 AMPS, 120V.
---------------	-------------------------

### GENERAL SPECIFICATIONS FOR 2771 BATHING POOL

INSTALLED SIZE	60 x 36 x 19-3/4 In. (1524mm x 914 mm x 502mm)
WEIGHT	70 Lbs. (32 Kg.)
WEIGHT w/WATER	562 Lbs. (255 Kg)
GAL. TO OVERFLOW	59 Gal. (224 L.)
BATHING WELL AT SUMP	40 x 22 In. (1016mm x 559mm)
BATHING WELL AT RIM	52 x 29 In. (1321mm x 737mm)
WATER DEPTH TO OVERFLOW	13-1/4 In. (337mm)
FLOOR LOADING (PROJECTED AREA)	37 LBS./Sq. Ft. (180 Kgs/Sq. m.)
PTS.	23.8
CUBE (FT <sup>3</sup> )	44.5

### NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

OPTIONAL 3 WALL TILING BEAD. KIT AND APRON NO. 9260.018 OR 9360.018 AVAILABLE AND MUST BE ORDERED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.