

# **HIRISE**<sub>TM</sub>

#### **Features**

- Metal construction
- ADA compliant lever handles
- (2) Quarter-turn washerless ceramic disc valves
- Stainless steel
- Double quarter-turn ceramic disc valves ensure reliable on/off operation
- · Deck-mount installation
- Anti-rotational flange simplifies installation
- ADA compliant lever handles
- 22" (55.9 cm) extended swing spout reach
- Fixed position wall flange
- 4 gallons (15.1 liters) per minute minimum flow rate at 45 psi (3.1 bars)


#### **Codes/Standards Applicable**

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- NSF 61
- All applicable US Federal and State material regulations

# DECK-MOUNT POT FILLER FAUCET K-7323

**ADA** 



#### Colors/Finishes

- BS: Brushed Stainless Steel
- S: Polished Stainless Steel

### **Specified Model**

Model	Description	Color/Finish
K-7323-4	Deck-mount pot filler faucet	□BS□S


# **Product Specification**

The deck-mount pot filler faucet shall be made of stainless steel construction. Product shall have a minimum flow rate of 4.0 gallons (15.1 liters) per minute at 45 psi (3.1 bar). Product shall feature double quarter-turn ceramic disc valves which ensure reliable on/off operation. Product shall be for deck-mount installation. Product shall feature an anti-rotational flange which simplifies installation. Product shall feature a 22" (55.9 cm) extended swing spout reach, ADA compliant lever handles, and a fixed position wall flange. Faucet shall be Kohler Model K-7323-4-\_\_\_\_\_.

# **HIRISE**<sub>TM</sub>

#### **Installation Notes**

Install this product according to the installation guide.

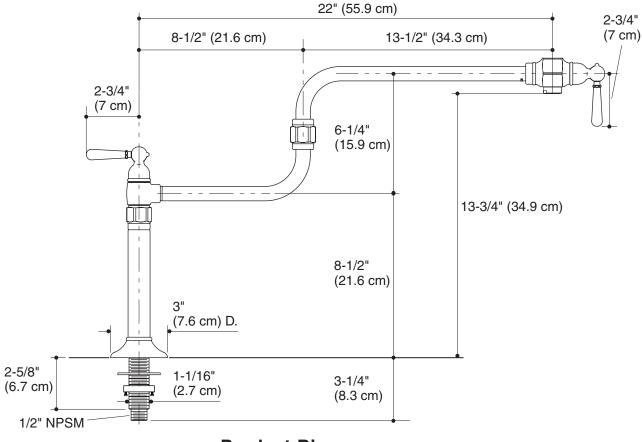

**Product Diagram** 

