

## Features

- High-flow valve ensures optimal water flow performance.
- Quarter-turn ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- 15.0 to 17.0 gpm (gallons per minute) flow rate.
- For use with bath- or deck-mount faucets.
- Requires valve trim (sold separately).

## Material

• Brass valve bodies.



Codes/Standards

ASME A112.18.1/CSA B125.1


KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty See website for detailed warranty information.



## High Flow Bath Valve K-300-K



\*Dimension allows  $\pm 1/4$ " (6 mm) handle adjustment during handle trim installation.

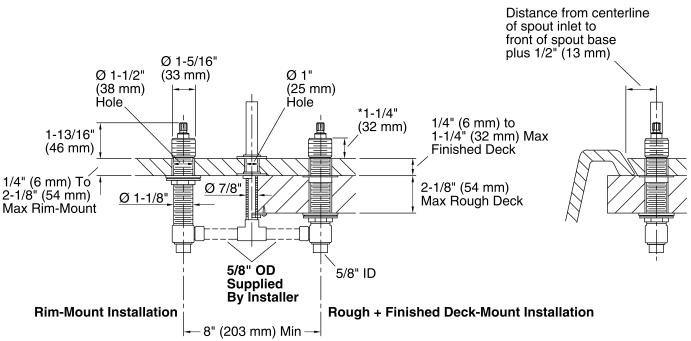

**Technical Information** 

All product dimensions are nominal.

