

Pull-Down Secondary Kitchen Sink Faucet K-597

Features

- Three-function pull-down sprayhead with touch control allows you to switch from stream to Sweep[®] spray to pause.
- Sweep[®] spray creates a wide, forceful blade of water for superior cleaning.
- DockNetik[®], a magnetic docking system located within the spout, smoothly glides and securely locks the sprayhead into place.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- ProMotion[®] technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- High-arch spout offers superior clearance for filling pots and cleaning.
- Single handle is simple to use and makes adjusting water temperature easy
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- 1.8 gpm (gallons per minute) maximum flow rate at 60 psi.
- Meets CalGreen requirements for kitchen faucets.

Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- For single-hole or three-hole installation (escutcheon plate included)
- Flexible supply lines and installation ring simplify installation.

Optional Accessories

1012715 Kitchen Faucet Deep Rough-In Kit





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF 61 NSF 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description




CP Polished Chrome

- VS Vibrant® Stainless
- BL Matte Black

KOHLER. Faucets

Simplice® Pull-Down Secondary Kitchen Sink Faucet K-597

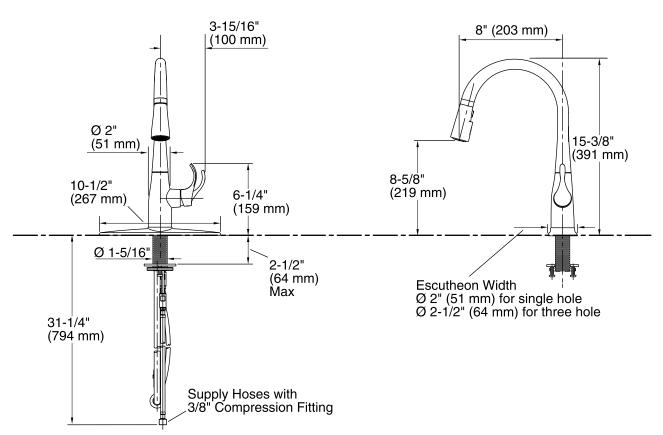

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: Pressure: 1.8 gal/min (6.8 l/min) 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

