

### Features

- Panel utilizes an integrated system of four 22-nozzle, fully adjustable sprayheads for stimulating hydrotherapy.
- Low-profile design complements any decor.
- MasterClean™ sprayface is easy to clean.
- 0.6 gpm (gallons per minute) maximum flow rate from each sprayhead for a maximum combined flow of 2.4 gpm (gallons per minute)
- 1/2-inch NPT connections.


### Material

- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Ceiling-mount
- Soldering template included for ease of installation.

Loose component/s: Soldering Template.

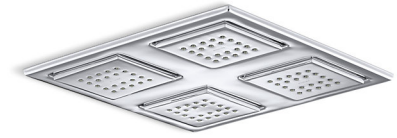

### Codes/Standards






ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992




### Kohler Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

| Color  | Code | Description              |
|--|------|--------------------------|
|  | CP   | Polished Chrome          |
|  | SN   | Vibrant® Polished Nickel |
|  | BN   | Vibrant® Brushed Nickel  |
|  | BV   | Vibrant® Brushed Bronze  |
|  | 2BZ  | Oil-Rubbed Bronze        |

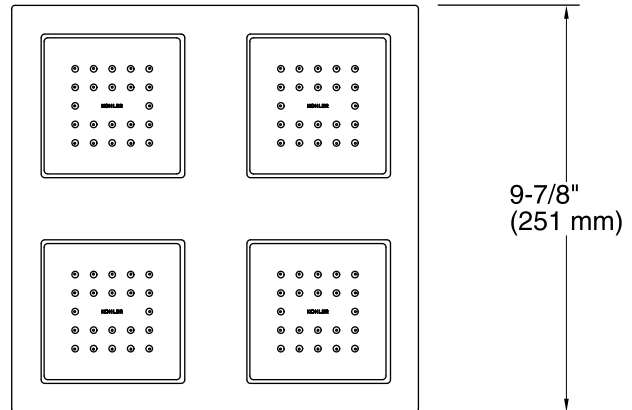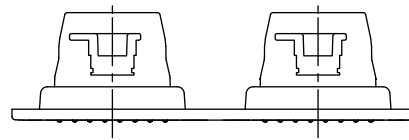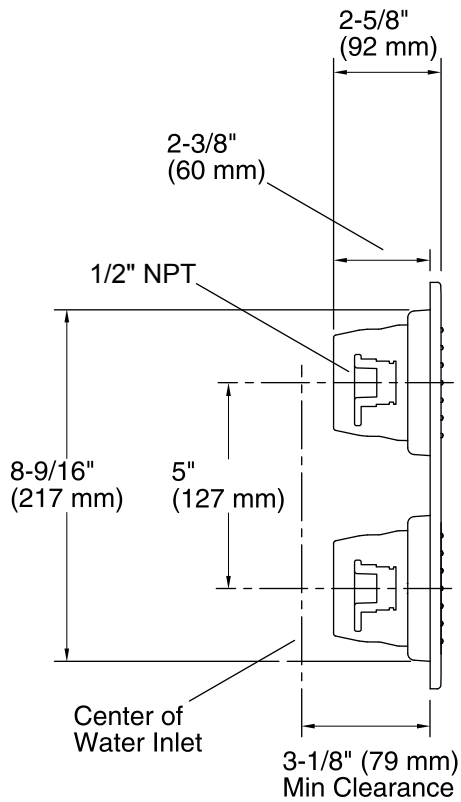

**Technical Information**

All product dimensions are nominal.

**Showerhead:**

Rated maximum flow: 2.5 gal/min (9.5 l/min)

Pressure: 80 psi (5.5 bar)

**Notes**

Install this product according to the installation guide.