



Features

- For use with K-99507-LGR / TKR Jacquard™, K-99520-LGR / TKR Damask[™], and K-99533-LGR / TKR Poplin[™] vanities.
- Catalyzed conversion varnish provides a durable moisture-resistant finish.
- Includes four electrical outlets (two switched; two unswitched).
- Appliances can remain plugged in while vanity door is closed.

Material

Solid wood and veneers.



Codes/Standards

CARB P2 None Applicable

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color Code Description

1WR Oxford Maple





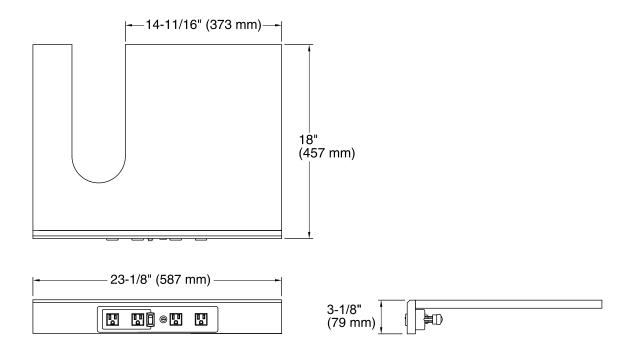

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Notes

Install this product according to the installation guide.

Install a Ground-Fault Circuit-Interrupter (GFCI) outlet prior to installing the vanity.

