

- GT49-YP1C Finish(CC)
- GT49-YP1K Finish(KK)
- GT49-YP1U Finish(UU)
- GT49-YP1Y Finish(Y)

- Two-Handle
- 3-Hole Installation
- Pforever Seal

Specifications

Features

- 1.5 GPM Flow Rate
- MatchMakers® Accessories Available
- Complete Collection with Coordinating Roman Tub and Tub & Shower Options
- Solid Cast Brass Body and Spout
- Metal Lever Handles
- Includes Metal Supply Nuts
- 8"-15" Variable Installation
- 3-Hole Installation
- Metal Pop-Up
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- EPA WaterSense Certification 1.5 gpm, 5.7L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

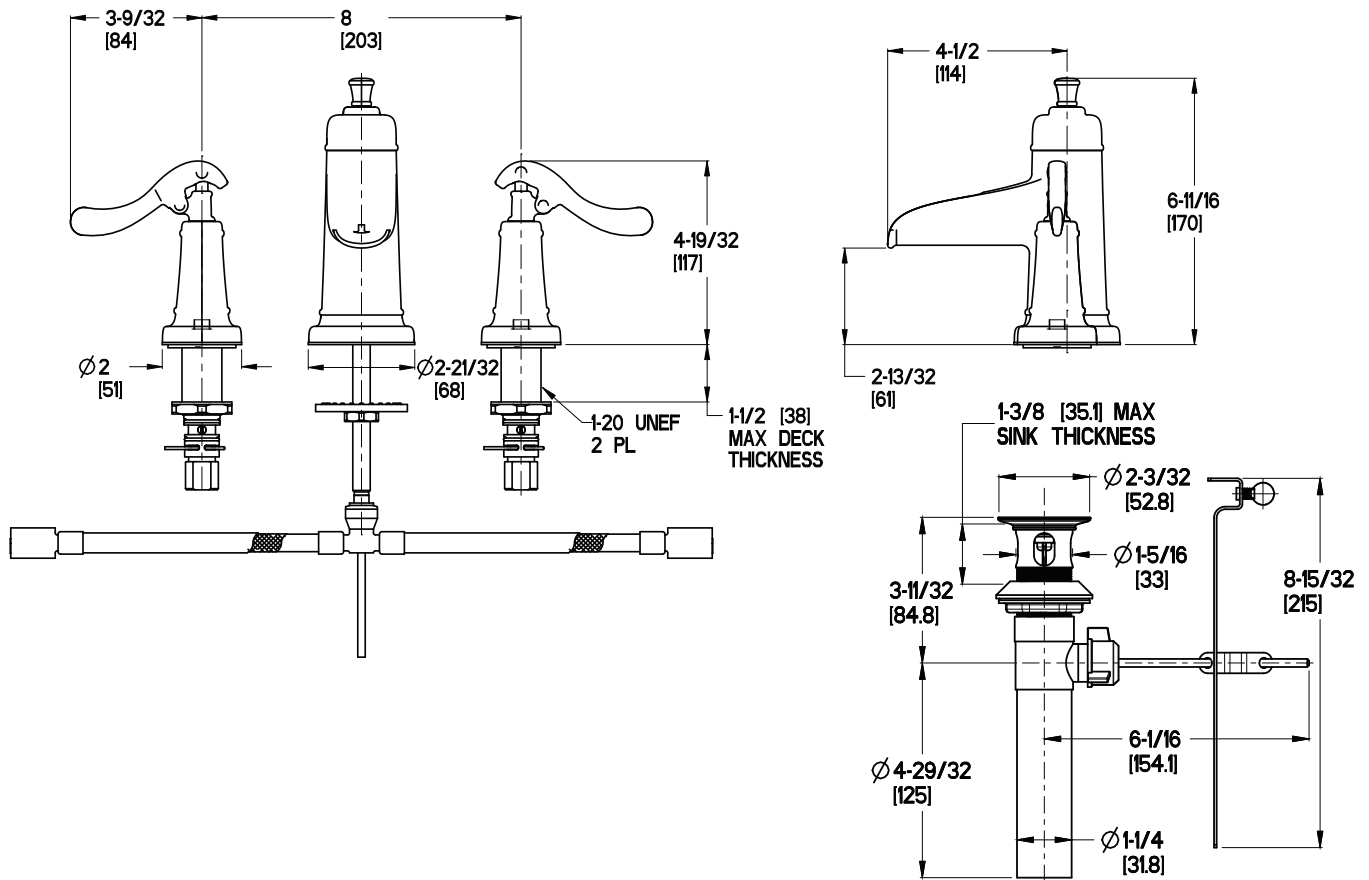

Metal Pop-Up

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings