STEXMIST®

Auto Drain Model: TSG-AD

Specifications – TSG-AD


Electrical Information: Connects to a factory installed Auto Drain terminal block, located inside the Generator cabinet.


Product Information: Normally Closed (N/C). Inlet & Outlet - 1/2" NPT Brass female thread.

Installation Notes: Valve should be installed with arrow on cover pointing away from Generator. Pipe Auto Drain outlet to empty into floor drain. Outlet must have a minimum air gap of twice the diameter of the Auto Drain pipe.

Product No. - Description:

9070 - To be used with 240v generators 9071 - To be used with 208v generators

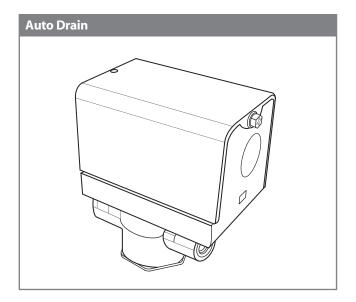

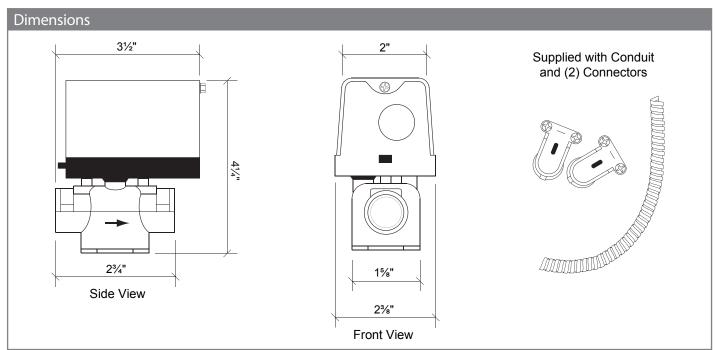

Application Information:

For use only with models TSG-7, TSG-10, and TSG-15 steam generators.

STEMIST* East Coast Office: 25 E. Union Ave., East Rutherford, NJ 07073 • Tel: 800-577-6478 • Fax: 201-933-0746

West Coast Office: 315 W. Pondera St., Suite F, Lancaster, CA 93534 • Tel: 800-355-6478 • Fax: 661-940-1617

01/12 Pub. No. 306-A