For Residential and Commercial Applications			
Job Name	Engineer / Architect		
Job Location	Wholesaler		
Submittal Date	Contractor		

## B8-\*\*DL Speedi Plumb<sup>®</sup> PLUS Braided Toilet Connectors -Female Iron Pipe Inlet

Use: For use in potable water distribution systems in accessible locations only.

#### **Design Features:**

- Engineered polymer braided fibers bend freely without kinking or crimping
- Reinforced PVC inner hose ensures durability
- Rubber washers provide a large pliable sealing surface and ensure a long lasting water-tight connection
- Long wing nuts allow for quick connection and ensure dependable thread engagement
- 8-sided pneumatic crimp provides greater dependability for realible nut-to-hose connections
- 🗹 No Lead

#### **Operating Specifications:**

Temperature:	40°- 140° F, intermittent to 180° F
Pressure:	125 PSI maximum

*Tubing Diameter:* 0.300" ID (0.550" OD)

MATERIAL SPECIFICATIONS		
Inner Hose	Reinforced PVC	
Braiding	PVC coated polyester yarn	
Barb	Brass	
Ferrule	Zinc-plated steel	
Nut	Brass, chrome plated or polypropylene	
Washer	Rubber	

#### Part Listing:

B8-9DL F	1/2" FIP* x 7/8" ballcock x 9" length
B8-12DL F	1/2" FIP* x 7/8" ballcock x 12" length
B8-16DL F	1/2" FIP* x 7/8" ballcock x 16" length
B8-20DL F	1/2" FIP* x 7/8" ballcock x 20" length


\*1/2" FIP also fits 7/16" rubber slip nut

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.





# B8-\*\*DL Speedi Plumb<sup>®</sup> PLUS Braided Toilet Connectors -Female Iron Pipe Inlet

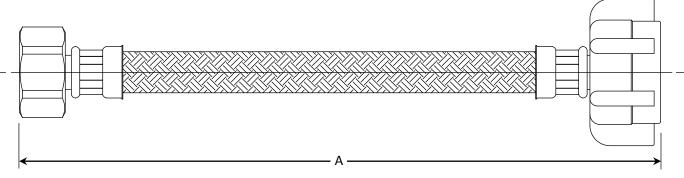

PART DIMENSIONS (Inches)			
Model	DIM. A		
B8-9DL	9.0 / 10.0		
B8-12DL	12.0 / 13.0		
B8-16DL	16.0 / 17.0		
B8-20DL	20.0 / 21.0		

### Listings & Certifications:

- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- No-Lead product CSA listed to Low-Lead Content Certification Program – Plumbing Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

