



## SERIN SINGLE CONTROL LAVATORY FAUCET

Style That Works Better



#### **MODEL NUMBER:**

2064.101 Serin Single Control Monobloc Lever handle. Metal Speed Connect® pop-up drain.

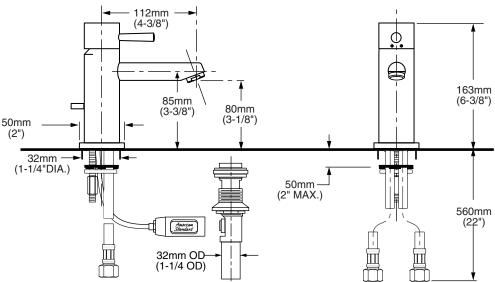

#### **GENERAL DESCRIPTION:**

Brass body. Washerless 35mm ceramic disc valve cartridge with integral hot limit safety stop. Braided flexible supply hoses with 3/8" compression connectors. 20" (500mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect® drain body with 1-1/4" (32mm) tail piece. 1.5 gpm/5.7L/min. maximum flow rate..

#### **PRODUCT FEATURES:**

**Brass Construction:** Durable. Easy to clean. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridge:** Assures a lifetime of smooth handle operation and drip-free performance.

**Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

**Low Lead:** Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

#### **Exclusive Speed Connect Metal Drain:**

- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

**Choice of Finishes:** Available in Polished Chrome or Satin Nickel (PVD).

#### SUGGESTED SPECIFICATION:

Single control lavatory faucet shall feature a brass body and metal lever handle. Fitting shall be equipped with flexible supplies with 3/8" compression connectors. Shall also feature washerless ceramic disc valve cartridge with an integral hot limit safety stop. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 2064.101.

C19




# SERIN<sup>™</sup> SINGLE CONTROL LAVATORY FAUCET

### **CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B 125 NSF 61/Section 9



		Finish Options	
Product		Polished Chrome	PVD Satin Nickel
Number	Description	002	295
2064.101	Serin Single Control Monobloc. Metal Speed Connect® pop-up drain.		

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.