
HERITAGE/AMARILIS

TWO-HANDLE PANTRY/BAR SINK FAUCET WITH BRASS GOOSENECK SPOUT

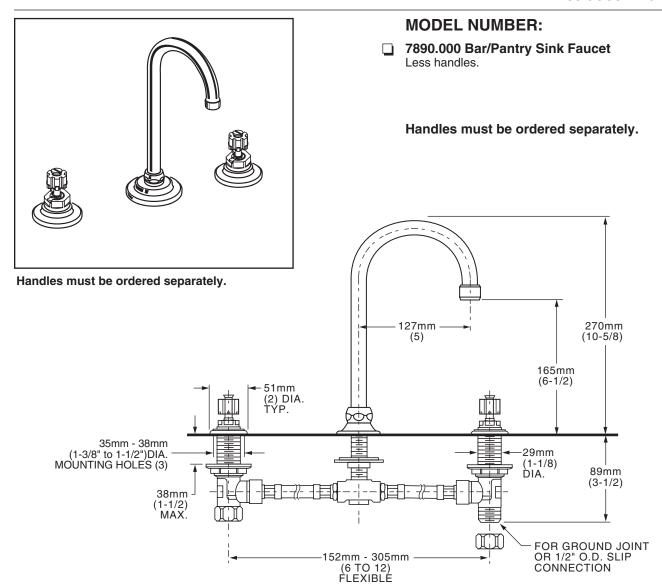

GENERAL DESCRIPTION:

Cast brass valve bodies with reinforced flexible hose connections for 6" to 12" (152mm to 305mm) installations. Amarilis 1/4 turn washerless ceramic disc valve cartridges - reversible for use with either lever or round handles. One-half inch male inlet shanks with brass coupling nuts and shank nuts. Brass gooseneck swivel spout. 2.2gpm/8.3L/min. maximum flow rate.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

Wide Selection of Handle Styles: Full range of interchangeable handle styles.

SUGGESTED SPECIFICATION:

Two handle bar sink/pantry faucet shall feature cast brass valve bodies with reinforced flexible hose connections for 6" to 12" installations. All brass shank nuts and coupling nuts. Shall also feature 1/4 turn washerless ceramic disc valve cartridges that are reversible for use with round or lever handles. Faucet shall be American Standard Model # 7890.000.____ and handle kit # 0000.




HERITAGE/AMARILIS

TWO-HANDLE PANTRY/BAR SINK FAUCET WITH BRASS GOOSENECK SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 CSA B 125 NSF 61/Section 9



		Finish (Options
Product			PVD Polished Brass
Number	Description	002	099
7890.000	Bar/Pantry Sink faucet. Less handles.		

Handles must be ordered separately.

To order Less Handles - Specify: 4 digit style number followed by three zeros and 3 digit finish number. Example 7890.000.099 = Bar Sink faucet in Polished Brass finish.

The above fittings will accept the following Amarilis-Series handles.

Metal Cross	Metal Lever	Porcelain Cross	Perfume Bottle	Metal Cross	Metal Lever	Porcelain Lever	Wrist Blade	4-Arm Lever	Lever	Crown	Acrylic	Lexington	Triune Cross
452	442	462	432	552	542	572	372H 372V	352H 352V	342H 342V	102H 102V	112H	902 912	862

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.