


Style That Works Better

COLONY SOFT SINGLE CONTROL KITCHEN FAUCET




MODEL NUMBER:

- ☐ 4175.501 Kitchen Faucet
 - Metal Lever Handle. Separate Handspray.
- ☐ 4175.503 Kitchen Faucet

Metal Lever Handle. Handspray through escutcheon.

☐ 4175.500 Kitchen Faucet

Metal Lever Handle. Less Handspray.

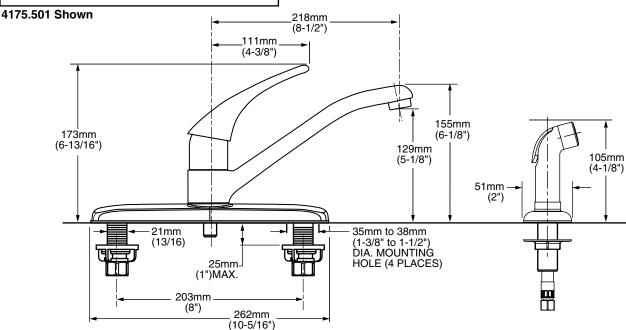

GENERAL DESCRIPTION:

Cast Brass 8-1/2" (218mm) long swivel spout. Metal lever handle. Washerless 40mm ceramic disc valve cartridge. Cast brass waterway with 1/2" male inlet shanks. Metal escutcheon plate (escutcheon size 10-5/16"L x 2-3/8"W). 2.2gpm/8.3L/min. maximum flow rate.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance.

Cast Brass Waterways with "City Shanks": Strong and durable. Integral tabs on casting provide a wobble-free installation.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

Memory Position Valving: Allows user to turn valve on and off at preferred temperature setting without readjusting handle position each time.

Large "Comfort Zone": Allows easy fine tuning of temperature.

Simple Installation: Fast and easy one person installation. Faucet drops in from top. Quick spin nuts secure faucet in place.

SUGGESTED SPECIFICATION:

Single control kitchen faucet shall feature cast brass waterway. Shall also feature washerless 40mm ceramic disc valve cartridge. Cast brass swivel spout. Fitting shall be American Standard Model # 4175.____.__.




COLONY SOFT SINGLE CONTROL KITCHEN FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B125 NSF 61/Section 9



		Finish Options	
Product		Polished Chrome	PVD Satin Nickel
Number	Description	002	295
4175.501	Kitchen Faucet. Separate Handspray.		
4175.503	Kitchen Faucet. Handspray through escutcheon.		
4175.500	Kitchen Faucet. Less Handspray.		

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.